

SHERPA 100 ECO



TECHNICAL DATA

SHERPA 100 ECO



Motor

Type	PMAC motor
Capacity	3.1 kW/ 4.2 pk
Revolutions per minute	1650 rpm
Adjusted amount of revolutions	1650 rpm
Cooling	Air cooled

Drive system

Hydrostatic on 2 rear wheels/2 front wheels through chain transmission

Max. speed

0-4 (proportional) km/h*

Capacity data

Breakout force	535 kg
Tractive force	290 kg*
Hydraulic drive- and working system	13 l/min -150 bar
Hydraulic tank capacity	38 l

Tires

Standard 4.00x10 - traction profile tires

Brakes

Braking system Hydrostatic on 2 rear wheels/2 front wh through chain transmission



Steering

Skid steering

Electrical system

Voltage	24 V
Battery capacity	8,6 kWh

Dimensions in mm

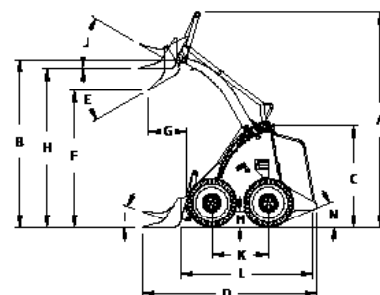

A Maximum height with bucket up	2545	J Bucket angle high	53°
B Height hinge point coupling plate	2050	K Wheelbase	657
C Maximum height with bucket low	1220	L Length to coupling plate	1520
D Length + bucket	2165	M Ground clearance	121
E Bucket angle when dumping	51°	N Rear Angle	14°
F Height underside of the bucket when dumping	1480	O Turning radius	1606
G Length from front wheel to bucket when dumping	180	P Turning radius with bucket	2250
H Height bucket horizontally	1860	Q Width	760
I Bucket angle low	26°		

* Depending on choice of tires

specifications and features are subject to change without notice

TECHNICAL DATA

SHERPA 100 ECO

Max. Dimensions (L mm x B mm x H mm, without bucket):


Standard 1520 x 760 x 1220

Kerb weight

759kg (with standard tires)

Tipping loads (kg)*:

Pallet forks low**

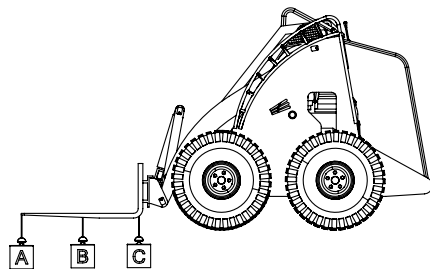


A 269

B 391

C 718

Pallet forks high**

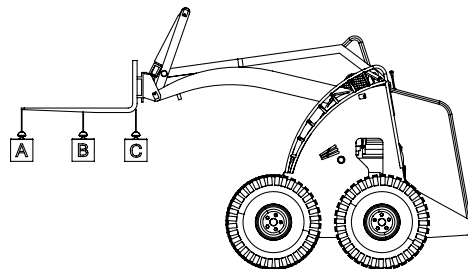

A 196

B 265

C 413

* Including driver 75kg

** Consider a safety factor of 30%

SHERPA 100 ECO

The SHERPA 100 ECO has brought about a true revolution in the world of construction and demolition work. By bundling the compact versatility of the SHERPA 100 and a powerful and durable electric motor, there is a SHERPA available that has incomparable benefits.

More information?

Call us +31 412 61 33 44

Canadabaan 14 | 5388 RT Nistelrode | www.sherpaminiloaders.com



SHERPA
MINI-LOADERS

specifications and features are subject to change without notice